


# XM 2535

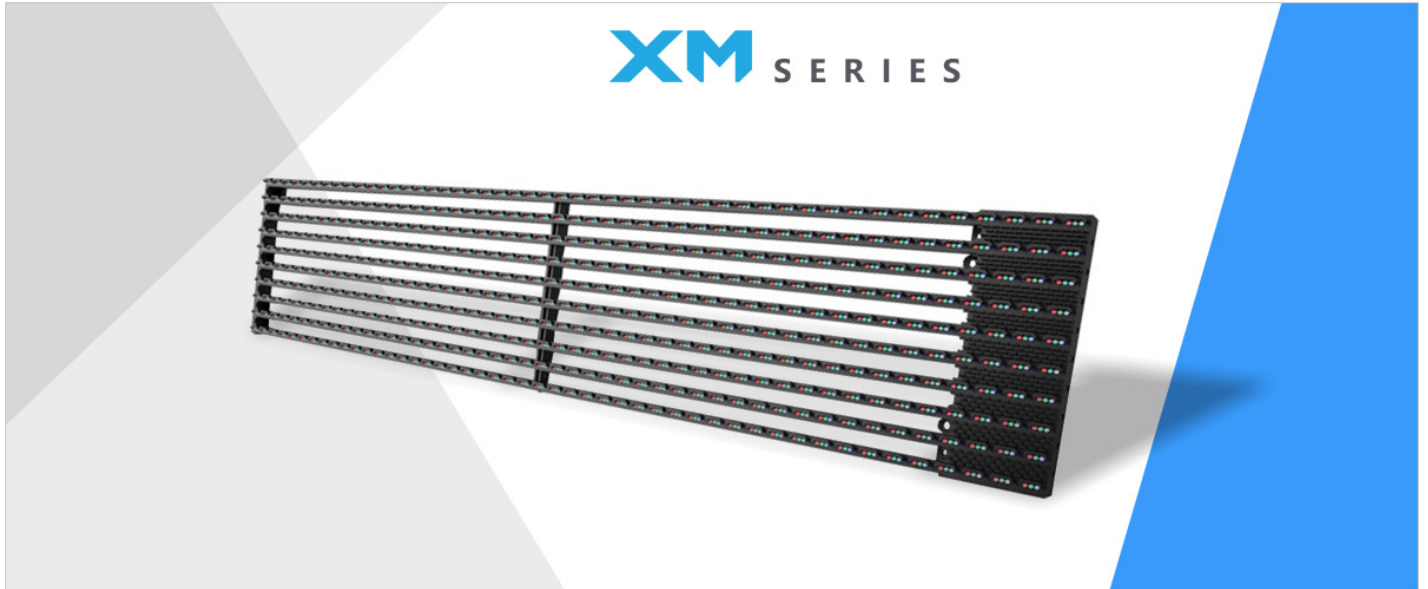

## BASIC SPECIFICATION

For more detailed information please contact us at [info@trueperformance.eu](mailto:info@trueperformance.eu)

Pixel configuration	DIP346	Brightness (nit)	6500-7000
Pixel Pitch (mm)	Width: 25 x Height: 35.71	IP rating (Front/Rear)	IP67
Pixel per cabinet (width x height)	60 x 7	Cabinet installation type	FIX
Pixel per module (width x height)	60 x 7	Maintenance	FRONT
Pixel density (pixels/sq.m.)	1120	Condition	OUTDOOR
Cabinet Dimensions (width x height)/(mm)	1500.00 x 250.00	AC Input Voltage (V)	AC 110 -240 V
Module Dimensions (width x height)/(mm)	1500.00 x 250.00	AC Input Frequency (Hz)	≥60 Hz
Panel material	Aluminum Body & PC Mask		
Cabinet area (sq.m.)	0.38		
Cabinet weight (kg)	3.90		
Module weight (kg)	3.90		