


XM2541

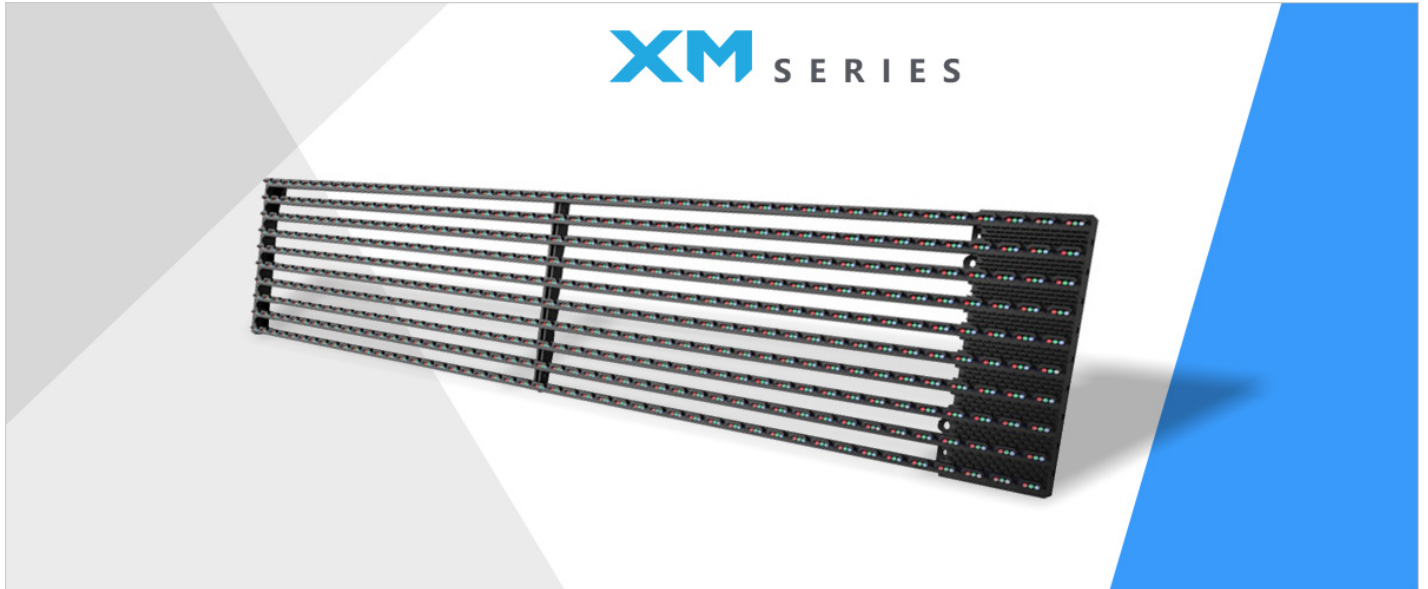

BASIC SPECIFICATION

For more detailed information please contact us at info@trueperformance.eu

| | | | |
|--|---------------------------|---------------------------|---------------|
| Pixel configuration | DIP346 | Brightness (nit) | 5800-6500 |
| Pixel Pitch (mm) | Width: 25 x Height: 41.67 | IP rating (Front/Rear) | IP67 |
| Pixel per cabinet (width x height) | 60 x 6 | Cabinet installation type | FIX |
| Pixel per module (width x height) | 60 x 6 | Maintenance | FRONT |
| Pixel density (pixels/sq.m.) | 959 | Condition | OUTDOOR |
| Cabinet Dimensions (width x height)/(mm) | 1500.00 x 250.00 | AC Input Voltage (V) | AC 110 -240 V |
| Module Dimensions (width x height)/(mm) | 1500.00 x 250.00 | AC Input Frequency (Hz) | ≥60 Hz |
| Panel material | Aluminum Body & PC Mask | | |
| Cabinet area (sq.m.) | 0.38 | | |
| Cabinet weight (kg) | 3.60 | | |
| Module weight (kg) | 3.60 | | |